

**FRAME:**

- 2" DEEP FRAME - ALUMINIZED STEEL
- 4" DEEP FRAME - ALUMINIZED STEEL

**EFFICIENCY:**

- 65% ASHRAE
- 85% ASHRAE
- 95% ASHRAE

**OPTIONAL GASKET MATERIAL:**


- HT ROPE - 1/4 INCH
- OTHER: \_\_\_\_\_

**GASKET LOCATION:**

- DOWNSTREAM
- UPSTREAM
- UPSTREAM AND DOWNSTREAM
- OTHER: \_\_\_\_\_

**NOTES:**

STANDARD DEPTHS: 1-3/4" AND 3-3/4"  
 ALUMINIZED FACEGUARDS ON BOTH SIDE OF FILTER  
 CLASS 1 PER UL STANDARD 900  
 MAX. OPERATING TEMP: 750 F

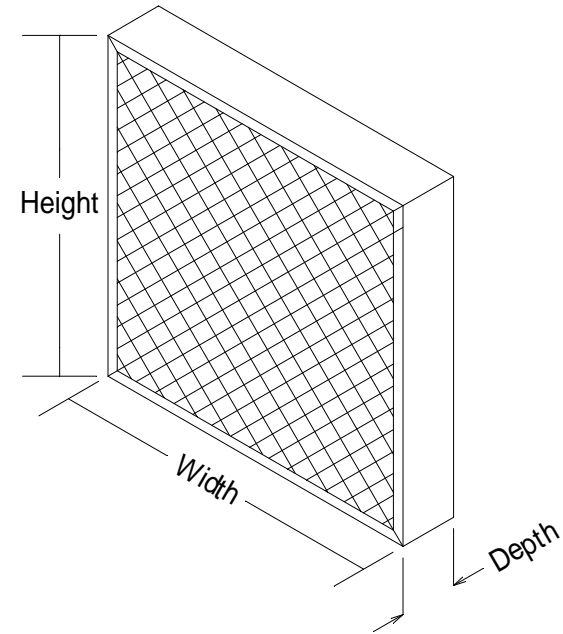

All Dimensions are Actual Size

Customer Notes / Additional Requirements




**Koch Filter Corporation**  
 Filtration Products Crafted with Pride  
 P.O. Box 3186 - Louisville KY 40201  
 625 W. Hill Street - Louisville KY 40208  
 Phone: (502) 634-4796 FAX: (502) 637-2280

**MULTI-CELL CS  
 FILTER SUBMITTAL**