


Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	102-680-011	700	0.28	4.0	12	8
12 x 12 x 2	11-1/2 x 11-1/2 x 1-3/4	102-062-035	500	0.28	2.7	12	8
12 x 20 x 2	11-1/2 x 19-1/2 x 1-3/4	102-062-002	850	0.28	4.5	12	8
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	102-680-012	1000	0.28	5.4	12	10
12 x 25 x 2	11-1/2 x 24-1/2 x 1-3/4	102-062-003	1050	0.28	5.6	12	10
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	102-680-013	975	0.28	5.5	12	10
14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	102-680-014	1225	0.28	6.9	12	11
14 x 30 x 2	13-1/2 x 29-1/2 x 1-3/4	102-062-039	1450	0.28	8.3	12	12
15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	102-680-015	1050	0.28	6.0	12	11
16 x 16 x 2	15-1/2 x 15-1/2 x 1-3/4	102-062-005	900	0.28	5.2	12	8
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	102-680-016	1125	0.28	6.5	12	12
16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	102-680-053	1350	0.28	7.8	12	10
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	102-680-017	1400	0.28	8.1	12	13
16 x 30 x 2	15-1/2 x 29-1/2 x 1-3/4	102-062-018	1675	0.28	9.5	12	12
18 x 18 x 2	17-1/2 x 17-1/2 x 1-3/4	102-062-007	1125	0.28	6.3	12	10
18 x 20 x 2	17-1/2 x 19-1/2 x 1-3/4	102-062-015	1250	0.28	7.0	12	12
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	102-680-018	1500	0.28	8.4	12	15
18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	102-062-009	1575	0.28	8.7	12	11
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	102-680-019	1400	0.28	8.0	12	13
20 x 24 x 2	19-1/2 x 23-1/2 x 1-3/4	102-680-020	1675	0.28	9.6	12	15
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	102-680-021	1750	0.28	10.0	12	15
20 x 30 x 2	19-1/2 x 29-1/2 x 1-3/4	102-062-010	2100	0.28	11.9	12	13
20 x 35 x 2	19-1/2 x 34-1/2 x 1-3/4	102-062-030	2450	0.28	13.9	12	15
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	102-680-022	2000	0.28	11.3	12	17
24 x 30 x 2	23-1/2 x 29-1/2 x 1-3/4	102-062-011	2500	0.28	14.3	12	14
25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	102-680-050	2175	0.28	12.4	12	12

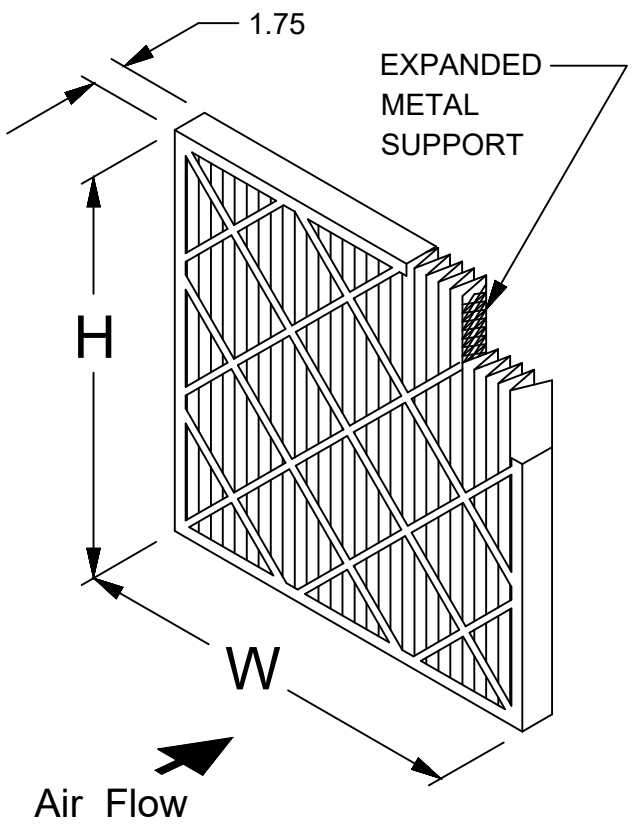

Standard Construction:

1. New White 100% Synthetic Media (Treated with Antimicrobial)
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 10 Pleats per Linear Ft.

Notes:

1. All Dimensions are in Inches Unless Otherwise Noted.
2. Drawing Not To Scale

Specifications:

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2017)
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 500 FPM
4. Classified per UL Standard 900
5. Max Operating Temp: 200 F (66C)
6. Tolerance: Height & Width - +/- 1/8"
7. Tolerance: Depth - +/- 1/16"

	<p style="text-align: center;">Microsafe 2" Standard Capacity</p>		REV	REVISION	BY / DATE
			LTR		
8401 Air Commerce Drive - Louisville KY 40219 Phone: (502) 634-4796 FAX: (502) 637-2280			Drawn By: Dave Miller Date: 23 August, 2022	Revision	