


| Nominal Size<br>H x W x D<br>(in) | Actual Size<br>H x W x D<br>(in) | Part Number | Capacity<br>(CFM) | Resistance<br>(in W.G.) | Media Area<br>(sq ft) | Carton<br>Qty | Weight per<br>Carton (lbs) |
|-----------------------------------|----------------------------------|-------------|-------------------|-------------------------|-----------------------|---------------|----------------------------|
| 24x24x12                          | 23-3/8 x 23-3/8 x 11-1/2         | 110-720-001 | 2000              | 0.58                    | 108                   | 1             | 24                         |
| 24x12x12                          | 23-3/8 x 11-3/8 x 11-1/2         | 110-720-002 | 1000              | 0.58                    | 53                    | 2             | 29                         |
| 24x20x12                          | 23-3/8 x 19-3/8 x 11-1/2         | 110-720-003 | 1650              | 0.58                    | 50                    | 1             | 23                         |
| 20x16x12                          | 19-3/8 x 15-3/8 x 11-1/2         | 110-720-004 | 1100              | 0.58                    | 58                    | 1             | 10                         |
| 20x20x12                          | 19-3/8 x 19-3/8 x 11-1/2         | 110-720-005 | 1400              | 0.58                    | 73                    | 1             | 13                         |
| 16x25x12                          | 15-3/8 x 24-3/8 x 11-1/2         | 110-720-006 | 1400              | 0.58                    | 74                    | 1             | 13                         |
| 24x18x12                          | 23-3/8 x 17-3/8 x 11-1/2         | 110-720-007 | 1500              | 0.58                    | 80                    | 1             | 13                         |
| 20x25x12                          | 19-3/8 x 24-3/8 x 11-1/2         | 110-720-008 | 1750              | 0.58                    | 94                    | 1             | 15                         |
| 24x24x6                           | 23-3/8 x 23-3/8 x 5-7/8          | 110-720-009 | 1000              | 0.58                    | 55                    | 2             | 27                         |
| 24x12x6                           | 23-3/8 x 11-3/8 x 5-7/8          | 110-720-010 | 500               | 0.58                    | 27                    | 4             | 34                         |
| 24x20x6                           | 23-3/8 x 19-3/8 x 5-7/8          | 110-720-011 | 825               | 0.58                    | 46                    | 2             | 25                         |
| 20x16x6                           | 19-3/8 x 15-3/8 x 5-7/8          | 110-720-012 | 550               | 0.58                    | 30                    | 2             | 17                         |
| 20x20x6                           | 19-3/8 x 19-3/8 x 5-7/8          | 110-720-013 | 700               | 0.58                    | 37                    | 2             | 24                         |
| 16x25x6                           | 15-3/8 x 24-3/8 x 5-7/8          | 110-720-014 | 700               | 0.58                    | 38                    | 2             | 21                         |
| 24x18x6                           | 23-3/8 x 17-3/8 x 5-7/8          | 110-720-015 | 750               | 0.58                    | 41                    | 2             | 24                         |
| 20x25x6                           | 19-3/8 x 24-3/8 x 5-7/8          | 110-720-016 | 875               | 0.58                    | 48                    | 2             | 26                         |

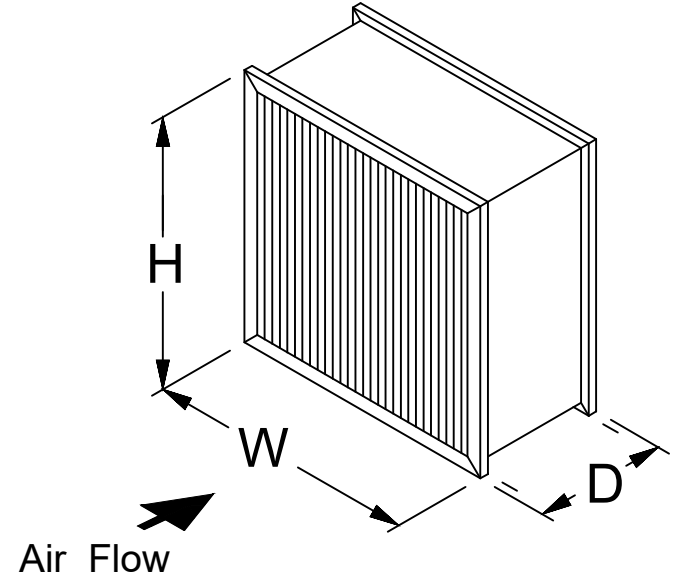

**Standard Construction:**

1. Gradient Density Microfiberglass Media
2. Frame: 26 gage Galvanized Cellsides
3. Media Separators: Corrugated Aluminum with hemmed safety edge
4. Sealant: Hotmelt used to seal media pack to cell sides
5. Header Depth: 13/16" Standard
6. Header on Upstream Side of filter

**Notes:**

1. All Dimensions are in Inches Unless Otherwise Noted
2. Drawing Not to Scale

**Specifications:**

1. MERV 14 ( 90-95% ) ( ASHRAE Standard 52.2-2017 )
2. Final Resistance: 1.5" W.G.
3. Rated Velocity: 500 FPM - 12" Deep
4. Rated Velocity: 250 FPM - 6" Deep
5. Classified per UL Standard 900
6. Maximum Operating Temperature: 350 F ( 177 C )
7. Tolerance: Height & Width - +0 / -1/8"
8. Tolerance: Depth - +/- 1/16"



# Multi-Cell SBM MERV 14

REV  
LTR

REVISION

BY /  
DATE

8401 Air Commerce Drive - Louisville KY 40219  
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller  
Date: September 7, 2022

Revision