


Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-793-023	1000	0.48	13.6	3	5
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-793-025	1115	0.48	14.4	3	6
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-793-026	1400	0.48	18	3	7
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	102-793-027	1500	0.48	19.7	3	8
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-793-028	1400	0.48	18.4	3	8
20 x 24 x 4	19-1/2 x 23-1/2 x 3-3/4	102-793-029	1675	0.48	22.2	3	9
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-793-030	1740	0.48	23.1	3	9
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-793-031	2000	0.48	21	3	11

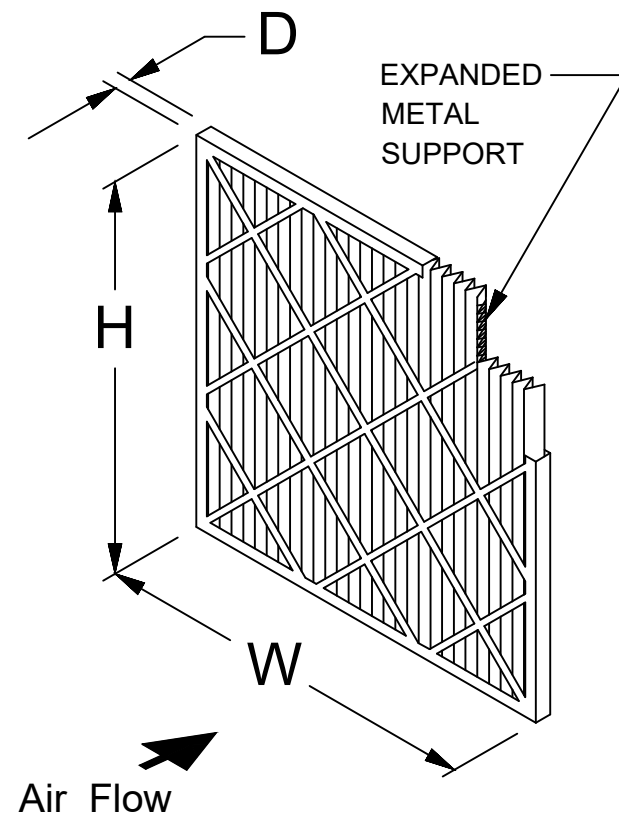

Standard Construction:

- 100% Synthetic Media Upstream and Carbon Media Layer Downstream
- Carbon Weight: 200 gsm
- Uses Celbond Particulate Structures (CPS) Technology
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame

Specifications:

- Efficiency: MERV 13 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.5" W.G.
- Rated Velocity: 500 FPM
- Maximum Operating Temperature: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

Notes:

- All Dimensions are in Inches Unless Otherwise Noted.
- Drawing Not To Scale

	M13/Odorkleen 200 4" Filters	REV LTR	REVISION	BY / DATE
8401 Air Commerce Drive - Louisville KY 40219 Phone: (502) 634-4796 FAX: (502) 637-2280	Drawn By: Dave Miller Date: 30 January, 2023	Revision		