

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	102-792-012	1000	0.42	8.5	12	14.5
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	102-792-016	1125	0.42	9.6	12	14.7
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	102-792-017	1400	0.42	12.0	12	15.2
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	102-792-018	1500	0.42	13.9	12	18
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	102-792-019	1400	0.42	12.1	12	18.3
20 x 24 x 2	19-1/2 x 23-1/2 x 1-3/4	102-792-020	1675	0.42	14.5	12	19.6
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	102-792-021	1750	0.42	15.1	12	20.7
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	102-792-022	2000	0.42	17.5	12	23.8

Standard Construction:


- 100% Synthetic Media Upstream and Carbon Media Layer Downstream
- Carbon Weight: 250 gsm
- Uses Celbond Particulate Structures (CPS) Technology
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame

Specifications:

- Efficiency: MERV 8 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.5" W.G.
- Rated Velocity: 500 FPM
- Maximum Operating Temperature: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

Notes:

- All Dimensions are in Inches Unless Otherwise Noted.
- Drawing Not To Scale

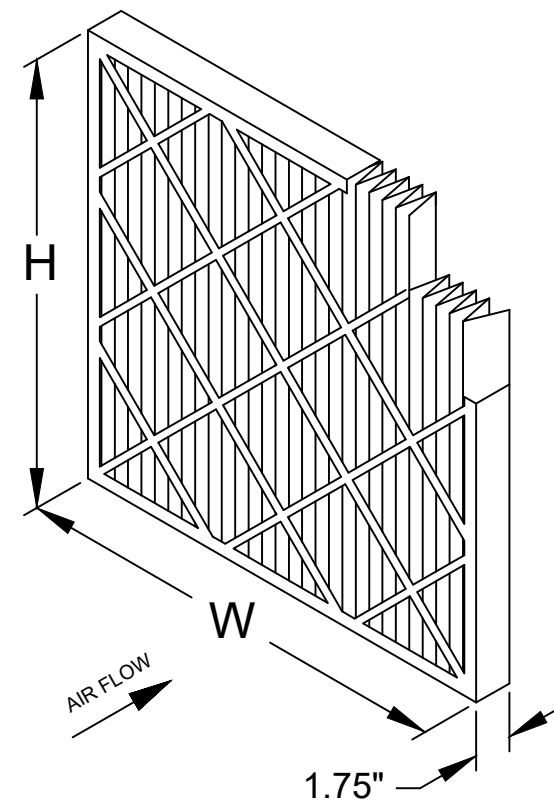

Odorkleen 250
2" Standard Capacity

REV
LTR

REVISION

BY /
DATE

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: D. Miller
Date: April 5, 2023

Revision