

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 12 x 1	11-1/2 x 11-1/2 x 3/4	102-796-12121	300	0.32	5.8	12	4
12 x 24 x 1	11-3/8 x 23-3/8 x 3/4	102-796-12241	600	0.32	11.6	12	8
16 x 20 x 1	15-1/2 x 19-1/2 x 3/4	102-796-16201	667	0.32	11.8	12	9
16 x 25 x 1	15-1/2 x 24-1/2 x 3/4	102-796-16251	833	0.32	16.0	12	11
18 x 24 x 1	17-1/2 x 23-1/2 x 3/4	102-796-18241	900	0.32	6.4	12	12
20 x 20 x 1	19-1/2 x 19-1/2 x 3/4	102-796-20201	833	0.32	6.0	12	12
20 x 24 x 1	19-1/2 x 23-1/2 x 3/4	102-796-20241	1000	0.32	7.2	12	13
20 x 25 x 1	19-1/2 x 24-1/2 x 3/4	102-796-20251	1050	0.32	7.5	12	14
24 x 24 x 1	23-3/8 x 23-3/8 x 3/4	102-796-24241	1200	0.32	8.7	12	15

**Standard Construction:**


- 100% Synthetic Media Upstream and Carbon Media Layer Downstream
- Carbon Weight: 592 gsm
- Uses Celbond Particulate Structures (CPS) Technology
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame

**Specifications:**

- Efficiency: MERV 10 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.5" W.G.
- Rated Velocity: 300 FPM
- Maximum Operating Temperature: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

**Notes:**

- All Dimensions are in Inches Unless Otherwise Noted.
- Drawing Not To Scale

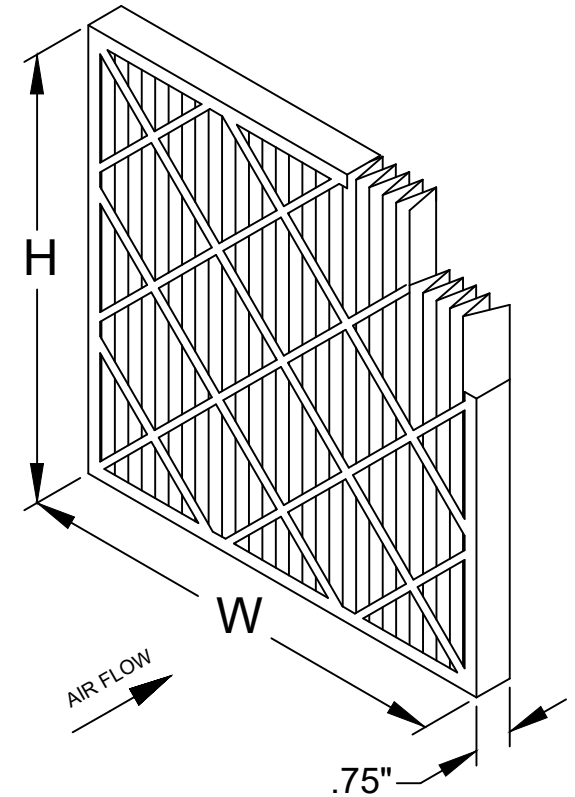

**Odorkleen 600**  
**1" Standard Capacity**

REV  
LTR

REVISION

BY /  
DATE

8401 Air Commerce Drive - Louisville KY 40219  
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: D. Miller  
Date: April 5, 2023

Revision