

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-796-123	1000	0.40	13.6	3	10
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-796-125	1115	0.40	14.4	3	10
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-796-126	1400	0.40	18.1	3	12
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	102-796-127	1500	0.40	19.8	3	14
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-796-128	1400	0.40	18.6	3	15
20 x 24 x 4	19-1/2 x 23-1/2 x 3-3/4	102-796-129	1675	0.40	22.3	3	19
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-796-130	1740	0.40	23.2	3	20
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-796-131	2000	0.40	26.0	3	23

Standard Construction:


- 100% Synthetic Media Upstream and Carbon Media Layer Downstream
- Carbon Weight: 592 gsm
- Uses Celbond Particulate Structures (CPS) Technology
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame

Specifications:

- Efficiency: MERV 10 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.5" W.G.
- Rated Velocity: 500 FPM
- Maximum Operating Temperature: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

Notes:

- All Dimensions are in Inches Unless Otherwise Noted.
- Drawing Not To Scale

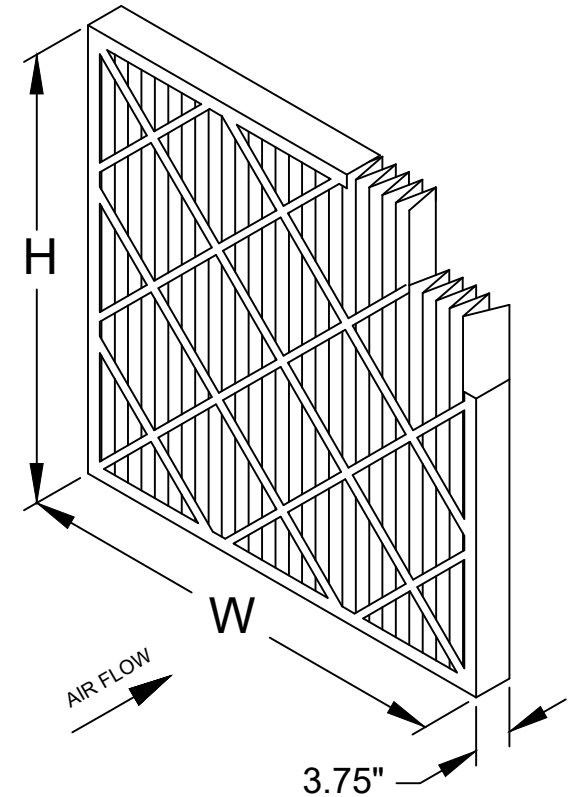

Odorkleen 600
4" Standard Capacity

REV
LTR

REVISION

BY /
DATE

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: D. Miller
Date: April 5, 2023

Revision