


Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
10 x 10 x 2	9-1/2 x 9-1/2 x 1-3/4	286-100-100	200	0.12	0.63	12	8
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	286-100-200	425	0.12	1.29	12	8
12 x 24 x 2	11-1/2 x 23-1/2 x 1-3/4	286-120-240	600	0.12	1.88	12	8
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	286-140-200	575	0.12	1.83	12	10
14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	286-140-250	750	0.12	2.30	12	10
15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	286-150-200	625	0.12	1.96	12	10
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	286-160-200	675	0.12	2.10	12	11
16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	286-160-240	800	0.12	2.53	12	12
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	286-160-250	850	0.12	2.64	12	11
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	286-180-240	900	0.12	2.86	12	8
18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	286-180-250	950	0.12	2.98	12	12
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	286-200-200	850	0.12	2.64	12	10
20 x 24 x 2	19-1/2 x 23-1/2 x 1-3/4	286-200-240	1000	0.12	3.18	12	13
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	286-200-250	1050	0.12	3.32	12	12
24 x 24 x 2	23-1/2 x 23-1/2 x 1-3/4	286-240-240	1200	0.12	3.84	12	10
25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	286-250-250	1300	0.12	4.17	12	12

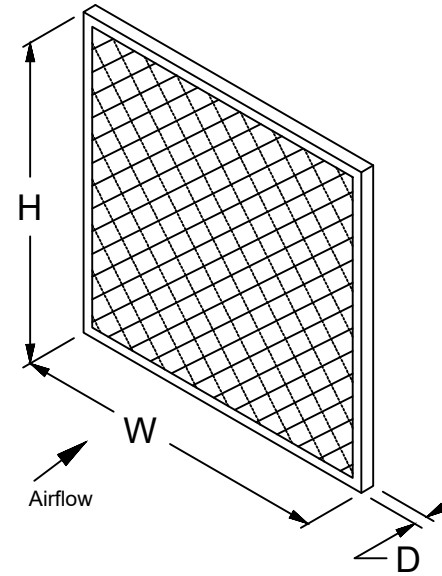

Standard Construction:

1. High Loft Polyester Media
2. Single Piece Kraft Board Frame

Specifications:

1. Final Resistance: 0.50" W.G.
2. Rated Velocity: 300 FPM
3. Classified per UL Standard 900
4. Maximum Operating Temperature: 200 F (93 C)
5. Tolerance: Height & Width - +/- 1/8"
6. Tolerance: Depth - +/- 1/16"

Notes:

1. All Dimensions are in Inches Unless Otherwise Noted
2. Drawing Not To Scale

KOCHFILTER
PURE PERFORMANCE

**2" C&I Disposable Poly
(Pressed Frame)**

REV
LTR

REVISION

BY /
DATE

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller
Date: May 16, 2023

Revision