


Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-701-023	1000	0.17	13.6	6	10
15 x 20 x 4	14-1/2 x 19-1/2 x 3-3/4	102-701-024	1050	0.17	14.4	6	11
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-701-025	1125	0.17	14.4	6	11
16 x 24 x 4	15-3/8 x 23-3/8 x 3-3/4	102-034-005	1350	0.17	17.3	6	14
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-701-026	1400	0.17	18.0	6	14
18 x 24 x 4	17-1/2 x 23-3/8 x 3-3/4	102-701-027	1500	0.17	19.7	6	13
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-701-028	1400	0.17	18.4	6	14
20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	102-701-029	1675	0.17	22.2	6	15
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-701-030	1750	0.17	23.1	6	15
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-701-031	2000	0.17	25.9	6	17
29 x 25 x 4	28-1/2 x 24-1/2 x 3-3/4	102-034-010	2525	0.17	36.0	6	19

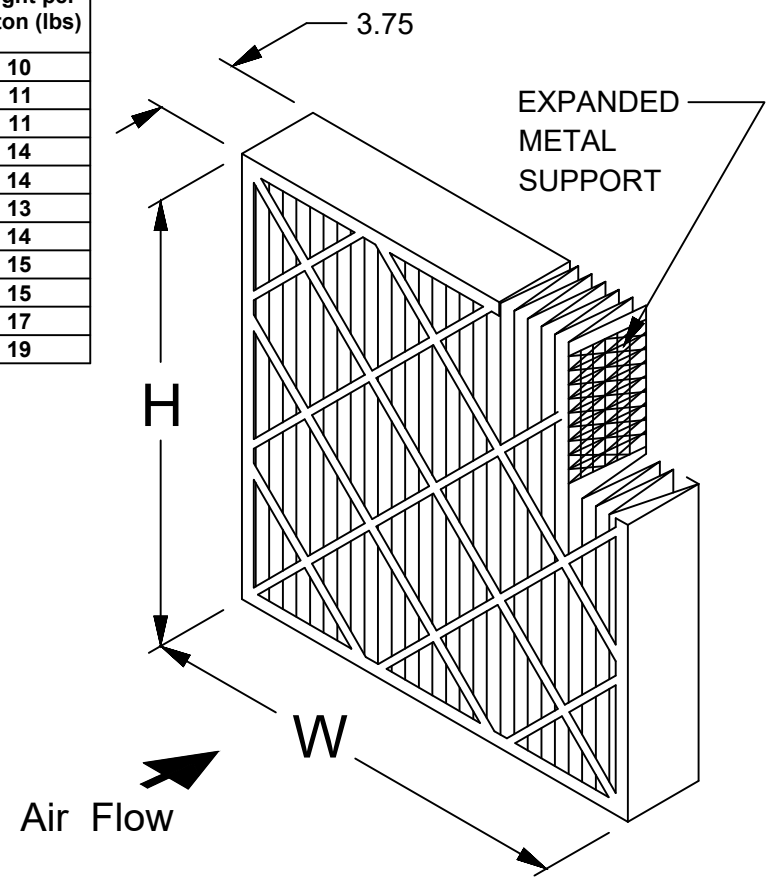

**Standard Construction:**

1. New White 100% Synthetic Media
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 11 Pleats per Linear Ft.

**Notes:**

1. All Dimensions are in Inches Unless Otherwise Noted.
2. Drawing Not To Scale

**Specifications:**

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2017)
2. Efficiency: MERV 8-A per Appendix J (ASHRAE Standard 52.2-2017)
3. Final Resistance: 1.0" W.G.
4. Rated Velocity: 500 FPM
5. Classified per UL Standard 900
6. Max Operating Temp: 200 F ( 66C )
7. Tolerance: Height & Width - +/- 1/8"
8. Tolerance: Depth - +/- 1/16"



**Multi-Pleat XL8  
4" High Capacity**

REV LTR	REVISION	BY / DATE
A	Add MERV 8-A Reference	DWM 120723
B	Updated Media Area	DWM 041824

8401 Air Commerce Drive - Louisville KY 40219  
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller  
Date: 23 August, 2022

Revision  
**B**