


Size (inches) Nominal H x W x D	Size (inches) Actual H x W x D	Koch Part Number	Capacity (CFM)	Resistance (inches W.G.)	Media Weight (lb.)
24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	111-800-101	2000	.34	18
12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	111-800-102	1000	.34	8
20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	111-800-103	1675	.34	15
20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	111-800-xxx	1400	.34	11
24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	111-801-101	2000	.74	26
12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	111-801-102	1000	.74	12
20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	111-801-103	1675	.74	24
20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	111-801-xxx	1400	.74	18

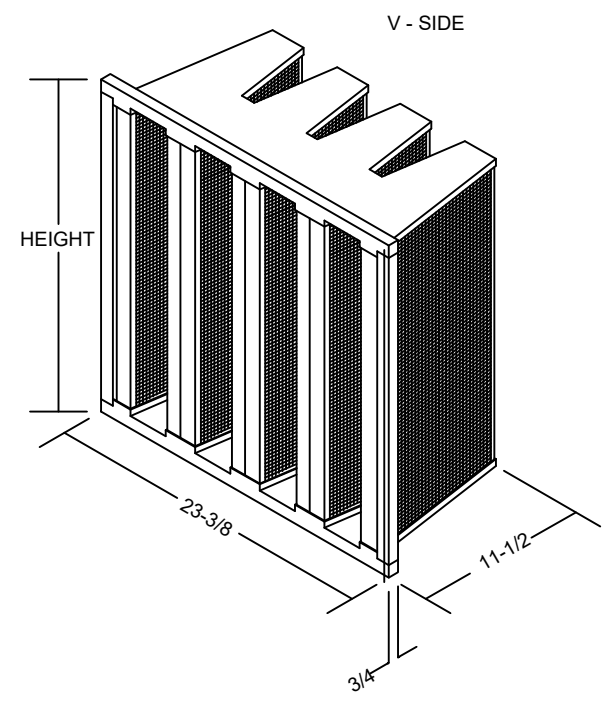

Standard Construction:

1. Carbon: Coconut Shell Carbon (CSC)
2. Carbon Activity Rating: Minimum 60% on Carbon Tetrachloride @ 25 degrees Celsius
3. Carbon contained in Honeycomb panels
4. Frame: High Impact Polystyrene Construction
5. Uprights: High Impact Polystyrene Construction
6. Sealant: Solid Polyurethane in all Vertical Supports
7. Header Dimension: 0.75"

Specifications:

1. Rated Velocity: 500 FPM
2. Initial Resistance at 625 FPM - .49 in. W.G.
3. Tolerance: Height & Width - +0 / - 1/8"
4. Tolerance: Depth - +/- 1/16"
5. Maximum Operating Temperature: 110 degrees Fahrenheit and 43 degrees Celsius



Koch Filter Corporation
 Filtration Products Crafted with Pride
 P.O. Box 3186 - Louisville KY 40201
 625 W. Hill Street - Louisville KY 40208
 Phone: (502) 634-4796 FAX: (502) 637-2280

DuraPure

Drawn By:	Dave Miller	Revision D
Date:	October 13, 2014	