

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	102-701-112	1000	0.25	7.8	12	12
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	102-701-116	1115	0.25	8.8	12	14
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	102-701-117	1400	0.25	11.0	12	15
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	102-701-118	1500	0.25	12.3	12	17
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	102-701-119	1400	0.25	11.1	12	15
20 x 24 x 2	19-1/2 x 23-1/2 x 1-3/4	102-701-120	1675	0.25	13.4	12	17
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	102-701-121	1740	0.25	14.0	12	18
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	102-701-122	2000	0.25	16.2	12	19

Standard Construction:


- 100% Synthetic Media
- Heavy-Duty Rust Resistant Expanded Metal Support on Downstream Side
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame
- 14 Pleats per Linear Ft.

Specifications:

- Efficiency: MERV 9 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified per UL Standard 900
- Max Operating Temp: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

Notes:

- All Dimensions are in Inches (Unless Otherwise Noted)
- Drawing Not to Scale

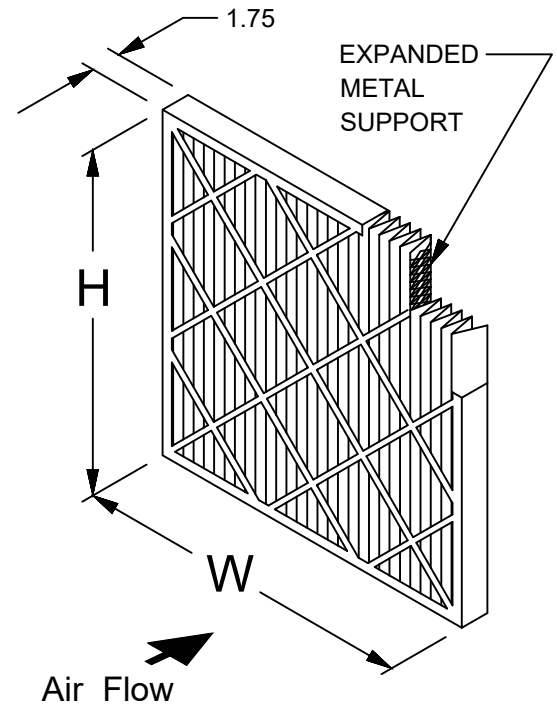

	Multi-Pleat BOSS MERV 9 2" High Cap	REV LTR	REVISION	BY / DATE
		A	Updated Efficiency to MERV 9	11/11/24
8401 Air Commerce Drive - Louisville KY 40219 Phone: (502) 634-4796 FAX: (502) 637-2280	Drawn By: Dave Miller Date: 23 August, 2022	Revision A		