

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-701-123	1000	0.16	13.6	6	12
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-701-125	1115	0.16	14.4	6	13
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-701-126	1400	0.16	18.1	6	16
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	102-701-127	1500	0.16	19.8	6	15
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-701-128	1400	0.16	18.6	6	16
20 x 24 x 4	19-1/2 x 23-1/2 x 3-3/4	102-701-129	1675	0.16	22.3	6	17
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-701-130	1740	0.16	23.2	6	18
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-701-131	2000	0.16	26.0	6	19

Standard Construction:


- 100% Synthetic Media
- Heavy-Duty Rust Resistant Expanded Metal Support on Downstream Side
- Moisture Resistant Beverage Board Frame (24 point)
- Double Wall Frame
- 11 Pleats per Linear Ft.

Specifications:

- Efficiency: MERV 9 (ASHRAE Standard 52.2-2017)
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified per UL Standard 900
- Max Operating Temp: 150 F (66 C)
- Tolerance: Height & Width - +/- 1/8"
- Tolerance: Depth - +/- 1/16"

Notes:

- All Dimensions are in Inches (Unless Otherwise Noted)
- Drawing Not to Scale

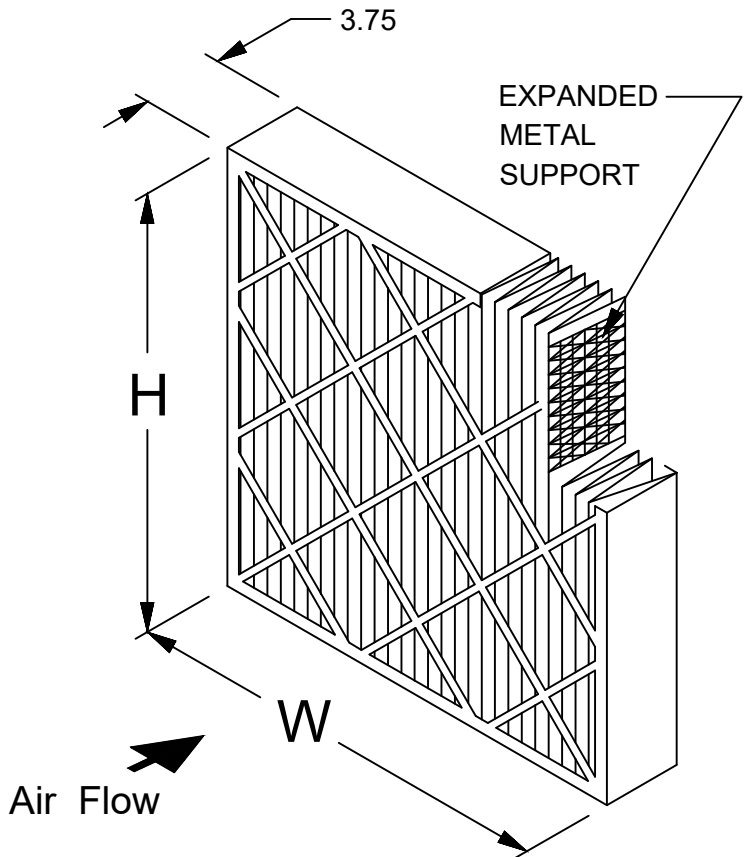

**Multi-Pleat BOSS
MERV 9
4" High Cap**

REV LTR	REVISION	BY / DATE
A	Updated Efficiency to MERV 9	11/11/24

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller
Date: September 8, 2022

Revision
A