

Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-500-123	1000	0.26	13.6	6	12
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-500-125	1115	0.26	14.4	6	13
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-500-126	1400	0.26	18.1	6	16
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	102-500-127	1500	0.26	19.8	6	15
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-500-128	1400	0.26	18.6	6	16
20 x 24 x 4	19-1/2 x 23-1/2 x 3-3/4	102-500-129	1675	0.26	22.3	6	17
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-500-130	1740	0.26	23.2	6	18
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-500-131	2000	0.26	26.0	6	19

Standard Construction:


1. New White 100% Synthetic Media
2. Heavy Gage Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 11 Pleats Per Linear Ft.

Specifications:

1. Efficiency: MERV 11 (ASHRAE Standard 52.2-2017)
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 500 FPM
4. Classified per UL Standard 900
5. Max Operating Temp: 200 F (93 C)
6. Tolerance: Height & Width - +/- 1/8"
7. Tolerance: Depth - +/- 1/16"

Notes:

1. All Dimensions are in Inches (Unless Otherwise Noted)
2. Drawing Not to Scale

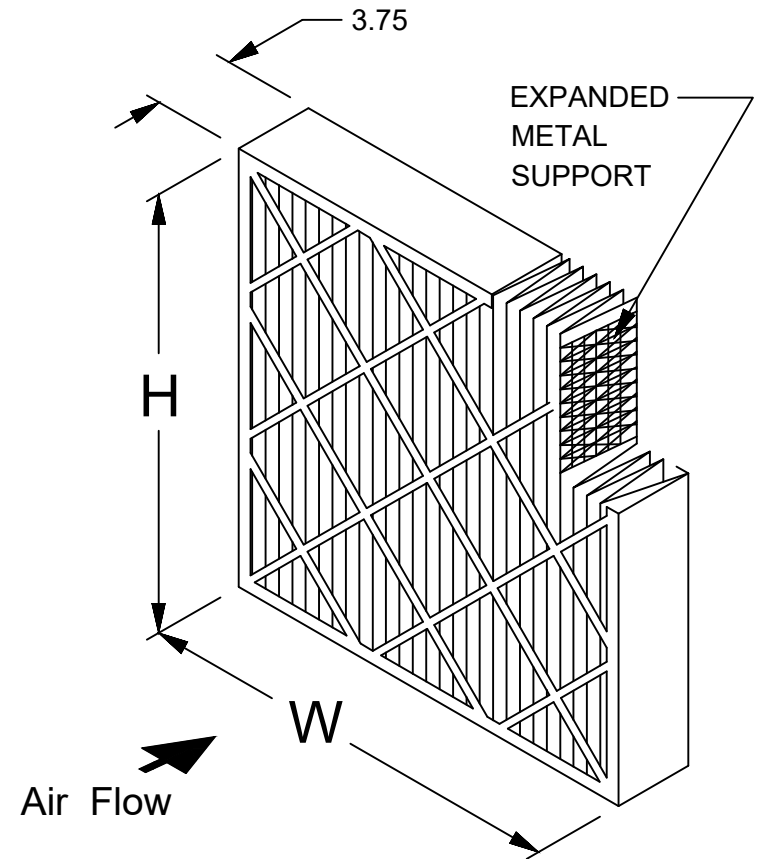

**Multi-Pleat BOSS
XL11 (4" High Cap)**

REV
LTR

REVISION

BY /
DATE

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller
Date: September 8, 2022

Revision