


Nominal Size W x H x D (in)	Actual Size W x H x D (in)	Part Number	Capacity (CFM)	Resistance (in W.G.)	Media Area (sq ft)	Carton Qty	Weight per Carton (lbs)
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	102-681-023	1000	0.17	13.6	6	10
15 x 20 x 4	14-1/2 x 19-1/2 x 3-3/4	102-681-024	1050	0.17	14.4	6	11
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	102-681-025	1125	0.17	14.4	6	11
16 x 24 x 4	15-3/8 x 23-3/8 x 3-3/4	102-074-005	1350	0.17	17.3	6	14
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	102-681-026	1400	0.17	18.0	6	14
18 x 24 x 4	17-1/2 x 23-3/8 x 3-3/4	102-681-027	1500	0.17	19.7	6	13
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	102-681-028	1400	0.17	18.4	6	14
20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	102-681-029	1675	0.17	22.2	6	15
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	102-681-030	1750	0.17	23.1	6	15
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	102-681-031	2000	0.17	21.0	6	17
25 x 29 x 4	24-1/2 x 29-1/2 x 3-3/4	102-074-010	2525	0.17	27.0	6	19

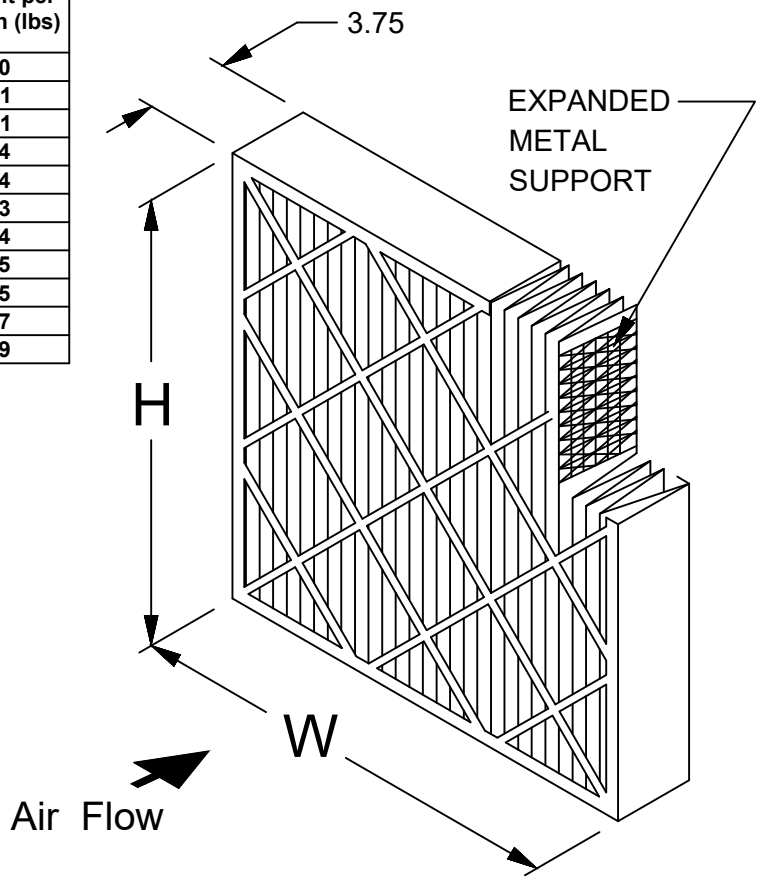

Standard Construction:

1. New White 100% Synthetic Media (Treated with Antimicrobial)
2. Rust Resistant Expanded Metal Support on Downstream Side
3. Moisture Resistant Beverage Board Frame (24 point)
4. Double Wall Frame
5. 11 Pleats per Linear Ft.

Notes:

1. All Dimensions are in Inches Unless Otherwise Noted.
2. Drawing Not To Scale

Specifications:

1. Efficiency: MERV 8 (ASHRAE Standard 52.2-2017)
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 500 FPM
4. Classified per UL Standard 900
5. Max Operating Temp: 200 F (66C)
6. Tolerance: Height & Width - +/- 1/8"
7. Tolerance: Depth - +/- 1/16"



**Microsafe
4" High Capacity**

REV LTR	REVISION	BY / DATE

8401 Air Commerce Drive - Louisville KY 40219
Phone: (502) 634-4796 FAX: (502) 637-2280

Drawn By: Dave Miller
Date: 23 August, 2022

Revision